


東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JDR110V40W/ K5M
光束	500 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

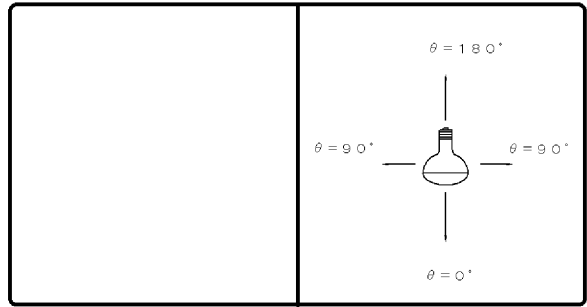

効率	F	%
	F	%
	F	100 %
	器具光束	500 lm

最大取付間隔	
A-A	0.3 H
B-B	0.3 H

備考	
----	--

光度 (cd/1000lm)			
0°	2800	25°	356
1°	2746	30°	250
2°	2684	35°	164
3°	2552	40°	104
4°	2378	45°	84
5°	2178	50°	70
6°	2050	55°	54
7°	1870	60°	42
8°	1734	65°	32
9°	1546	70°	26
10°	1400	75°	18
11°	1230	80°	14
12°	1062	85°	10
13°	968	90°	6
14°	902		
15°	844		
16°	730		
17°	676		
18°	620		
19°	580		
20°	544		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0	0		
室指数	照明率 (×0.01)																			
0.60	73	67	64	60	58	56	72	66	63	60	57	56	62	59	57	55	56	55	52	51
0.80	81	73	71	67	65	63	79	72	70	66	65	62	69	66	64	62	63	61	59	58
1.00	87	78	78	72	72	68	85	77	77	72	71	68	74	70	69	67	68	66	64	62
1.25	91	81	82	76	76	71	89	80	81	75	75	71	78	74	73	70	72	70	67	66
1.50	94	83	86	78	80	74	92	82	84	77	79	74	81	76	77	73	74	72	69	68
2.00	99	86	92	82	86	78	96	85	90	81	84	78	86	80	81	77	79	76	73	72
2.50	102	88	96	84	90	81	99	87	93	84	88	81	89	82	85	79	82	78	76	74
3.00	104	90	99	86	94	84	101	88	96	85	92	83	91	84	88	82	84	80	78	77
4.00	108	91	103	89	99	87	104	90	100	88	96	86	94	86	92	85	87	83	81	80
5.00	110	93	106	91	102	89	106	92	103	90	100	88	97	88	94	87	90	85	83	82
10.00	114	95	112	95	111	94	110	94	108	94	107	93	102	92	101	91	95	90	88	87

