

東芝照明器具配光データシート


名称	東芝LED防犯灯
形名	LEDK-78927N-LS1

光源	名称	LED
	形名	LED
	光束	810 lm × 1



前面	グローブ (透明)
反射面	

保守率	良	0.69
	中	0.67
	否	0.63

効率	F $\frac{1}{2}$	1.5 %
	F $\frac{1}{4}$	98.5 %
	F \bigcirc	100 %
	器具光束	810 lm

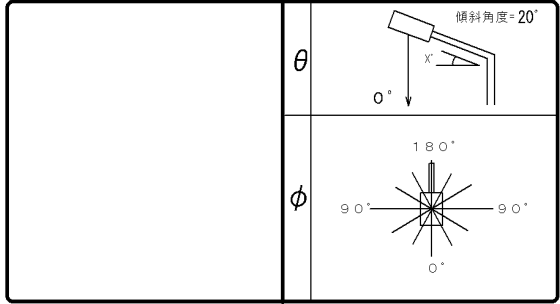

備考

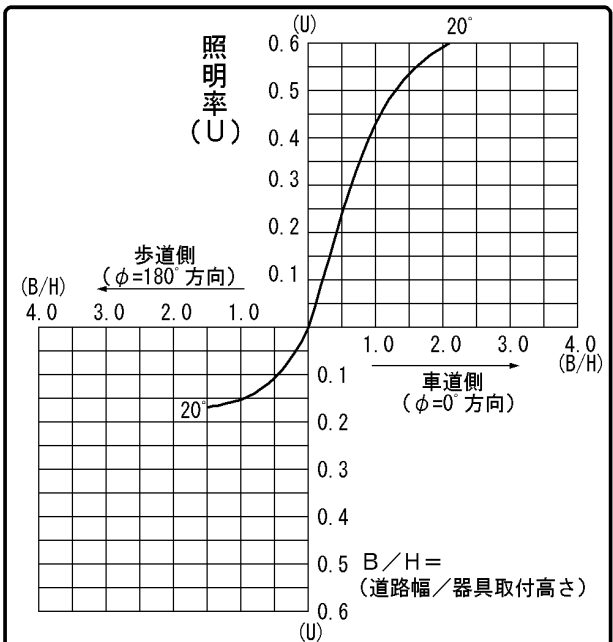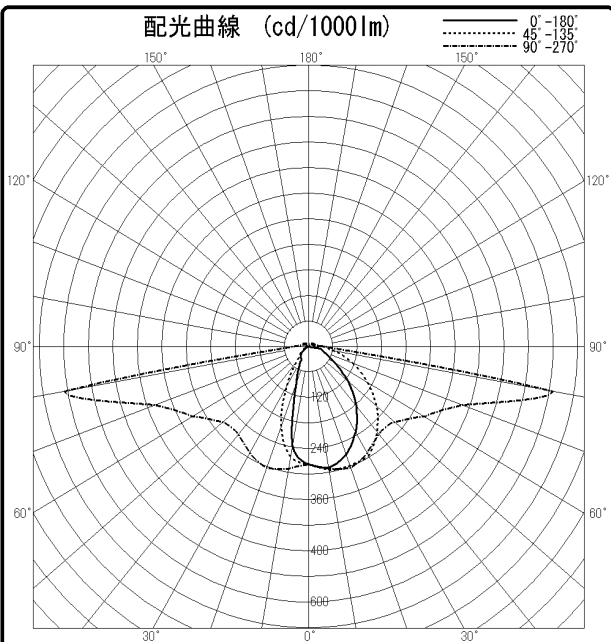

$\theta \backslash \phi$	0°	45°	90°	135°	180°
0°	276	276	276	276	276
10°	288	294	291	263	234
20°	271	298	303	198	90
30°	232	295	289	108	38
40°	183	262	269	46	31
50°	129	219	276	28	25
60°	73	168	330	18	13
70°	44	115	403	10	5
80°	30	70	609	4	0
90°	18	38	40	0	0
100°	6	6	2	0	0
110°	0	1	0	0	0
120°	0	0	0	0	0
130°	0	0	0	0	0
140°	0	0	0	0	0
150°	0	0	0	0	0
160°	0	0	0	0	0
170°	0	0	0	0	0
180°	0	0	0	0	0

