

東芝照明器具配光データシート


名称	直管形LEDランプシステム照明器具
形名	LET-41007-L S9

光源	名称	LED (定格出力タイプ)
	形名	LDL40T・N/19 /26
	光束	2600 lm × 1

前面	
反射面	塗装 (白)

保守率	良	0.88
	中	0.86
	否	0.81

効率	F	17%
	F	83%
	F	100%
	器具光束	2600 lm

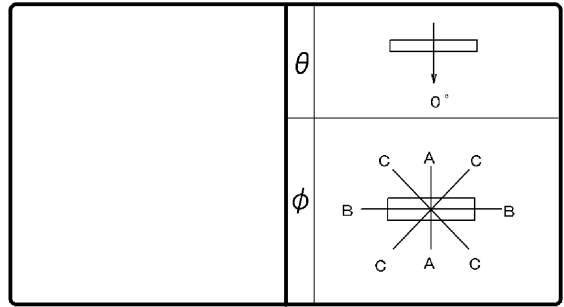

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	230	230	230
10°	223	226	227
20°	216	212	216
30°	206	189	200
40°	193	160	179
50°	177	126	155
60°	158	90	131
70°	139	54	107
80°	119	21	85
90°	100	0	67
100°	83	0	53
110°	68	0	43
120°	54	0	31
130°	44	0	10
140°	16	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0							
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0							
室指数	照明率 (×0.01)																							
0.60	56	52	42	40	33	32	54	50	40	38	32	31	37	36	30	29	28	28	23	21				
0.80	67	61	52	49	43	41	64	59	50	48	42	40	47	45	39	38	37	36	31	28				
1.00	74	67	60	55	50	47	70	64	57	53	48	46	53	50	45	43	42	41	36	32				
1.25	82	73	68	62	57	54	77	70	65	60	55	52	59	56	52	49	48	47	41	38				
1.50	87	76	73	66	63	59	82	73	70	64	61	57	64	60	56	54	52	51	45	41				
2.00	95	83	83	74	73	67	90	79	79	71	70	65	72	67	65	61	60	58	52	48				
2.50	100	86	89	78	80	72	94	83	84	76	76	70	77	71	70	66	65	62	57	52				
3.00	103	89	93	82	85	76	98	85	89	79	81	74	81	74	75	70	68	65	60	56				
4.00	108	92	100	86	93	81	102	89	95	84	88	79	86	78	81	75	74	70	65	61				
5.00	111	94	104	89	98	85	105	91	99	87	93	83	89	81	85	78	77	73	69	64				
10.00	118	99	114	96	110	93	111	96	108	93	104	91	97	87	94	85	85	80	76	71				

