

產品承認書

Specification for Approval

NO. T1602012

客 戶 駿嘉興業有限公司
CUSTOMER
品 名 HRF
STYLE
規 格 2×0.75mm² Black
SIZE

客 戶 確 認 Customer Approval	核 準 Approved By	審 核 Checked By	制 作 Made By
			胡 玲




备注: 1. 此承認書確認后,敬請回簽於我司,謝謝!

東莞長聯電線電纜有限公司
Dongguan Ever United Electric Wire & Cable Co.,Ltd.


China: 廣東省東莞市虎門鎮黃村石鼓崗工業區
Shi Gu Gang Industrial District, Huangcun, Humen, Dongguan, Guangdo

Tel: 86-769-85703585/86094608 Fax: 86-769-85703707/85703575

E-mail: fqsales_lucky@163.com Web: <http://www.luckyunited.net>

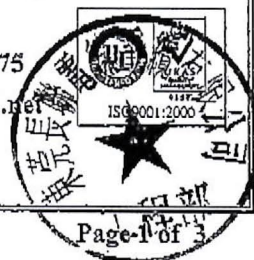

SPECIFICATION			
Style	HRF	Document No.	T1602012
Size	2×0.75mm ²	Issued Date.	2016.06.15
Standard: Requirement for customer.			
1: CONSTRUCTION:			
Conductor	Size (mm ²)	2×0.75	
	Construction (No./mm)	30/0.18±0.005BC(裸銅)	
	Lay of strands (mm)	S 35 ↓	
	Diameter Of strands (mm)	1.13	
Seperator		NO Separator	
Insulation	Material	CPE (Chlorinated Polyethylene)	
	Average Thickness (mm)	0.80	
	Minimum Thickness (mm)	0.64	
	Color	White, White (一條芯線印字, 一條芯線注藍條)	
	Diameter (mm)	2.80±0.15	
集合	絞距	S 45±5	
	填充	10S/10紡化絲短纖	
補強線		6000dtex × 4股	
Braiding	Material	840D滌綸絲	
	Number of Carriers	32	
	Crossings per inch (每英寸目數)	22	
	Over Diameter(mm)	8.10+0.30/-0.20	
	Color	黑色	





2: The electrical & physical properties

Item		(mm ²)	2×0.75
Rating voltage (V)			300
Cond.resistance (Ω /km/20°C max.)			25.1
Spark test (kv/0.15sec.AC.)			5.0
Insulation resistance (MΩ .km/min/20°C)			1.0 ↑
Electric strength (kv/15min.AC.in water)		In air	3.0
		In water	1.0
Insulation	Unaged	Tensile Strength (N/mm ²)	8.0 ↑
		Elongation (%)	300 ↑
	Aged	Tensile Strength(120±3°C ×120H)	80% ↑
		Elongation(120±3°C ×120H)	70% ↑
连续使用最高温度(105°C)			OK
Flame Test 水平或倾斜燃烧			OK

Marking: Oil Blue ink on every core.

<PS>E JET HRF 2×0.75mm² SHIRUBA LUCKY UNITED

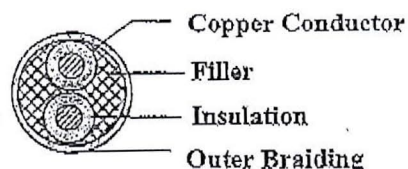

Version:1.2

東莞長聯電線電纜有限公司