


# 東芝ランプ 配光データシート

名称	ネオハロビーム
形名	JDR110V60W/ K5S
光束	1000 lm × 1

保守率	良	0.91
	中	0.89
	否	0.84

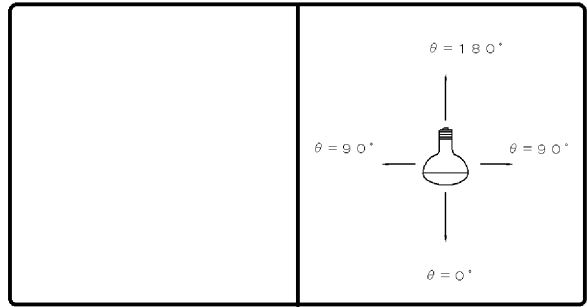

効率	F	%
	F	%
	F	100 %
	器具光束	1000 lm

最大取付間隔	
A-A	0.2 H
B-B	0.2 H

備考

光度 (cd/1000lm)			
0°	5900	25°	232
1°	5697	30°	168
2°	5275	35°	120
3°	4506	40°	75
4°	3811	45°	54
5°	2950	50°	45
6°	2584	55°	35
7°	2155	60°	31
8°	1815	65°	28
9°	1559	70°	25
10°	1359	75°	19
11°	1200	80°	17
12°	1075	85°	14
13°	958	90°	12
14°	855		
15°	786		
16°	695		
17°	615		
18°	556		
19°	505		
20°	452		

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	30	10	0	0		
室指数	照明率 (×0.01)																			
0.60	72	66	63	60	58	56	70	65	63	60	58	56	61	59	57	56	57	56	53	52
0.80	78	71	70	65	64	62	76	70	69	65	64	62	67	64	63	61	62	61	58	57
1.00	83	75	75	70	69	66	81	74	74	69	69	66	72	68	67	65	66	64	62	61
1.25	86	77	79	72	73	68	84	76	77	71	72	68	75	70	70	67	69	67	64	63
1.50	89	78	82	74	76	70	87	77	80	73	75	70	77	72	73	69	71	68	66	65
2.00	93	81	86	77	81	74	90	80	84	76	79	73	80	75	76	72	74	71	69	67
2.50	96	82	90	79	85	76	93	81	87	78	83	76	83	77	79	74	76	73	71	70
3.00	98	84	92	81	88	78	95	83	90	80	86	78	85	78	82	76	78	75	73	71
4.00	101	86	96	83	93	81	97	85	94	82	90	81	88	81	86	79	82	78	76	74
5.00	103	87	99	85	96	84	99	86	96	84	93	83	90	82	88	81	84	80	78	77
10.00	107	89	105	89	104	88	103	88	102	88	101	87	95	86	94	86	89	84	83	81

