


東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6L-H-GX5 3/700
光束	700 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

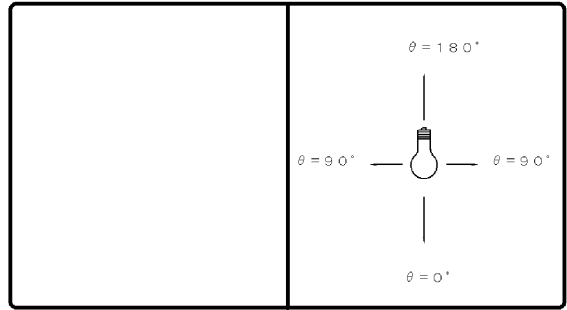



効 率	F		%
	F		%
	F	100	%
	器具 光束	700	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	363		
10°	355		
20°	331		
30°	292		
40°	243		
50°	189		
60°	135		
70°	84		
80°	39		
90°	13		
100°	11		
110°	10		
120°	8		
130°	7		
140°	5		
150°	3		
160°	2		
170°	1		
180°	0		


反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	63	58	49	47	41	40	61	57	48	46	40	39	46	45	39	38	38	38	33	31																	
0.80	75	68	61	58	52	50	73	67	60	57	52	50	57	55	50	49	49	48	43	41																	
1.00	82	74	69	64	59	56	79	72	67	63	58	56	64	61	56	54	55	53	49	46																	
1.25	90	80	77	70	68	63	87	78	75	69	66	63	71	67	64	61	61	60	55	53																	
1.50	95	83	83	75	74	68	91	81	80	74	72	67	76	71	69	66	66	64	60	57																	
2.00	103	89	92	82	84	76	99	87	89	81	82	75	84	78	78	73	74	72	67	65																	
2.50	107	93	98	87	90	81	103	91	95	85	88	80	89	82	83	78	79	76	72	69																	
3.00	111	95	102	90	95	85	106	93	99	88	93	84	93	85	88	82	83	79	76	73																	
4.00	115	98	108	94	102	90	111	96	105	92	99	89	97	89	93	86	88	84	81	78																	
5.00	118	100	112	96	107	93	113	98	108	95	103	92	100	92	97	89	91	87	83	81																	
10.00	124	104	121	102	117	100	119	102	116	100	113	98	107	97	105	95	98	93	90	87																	

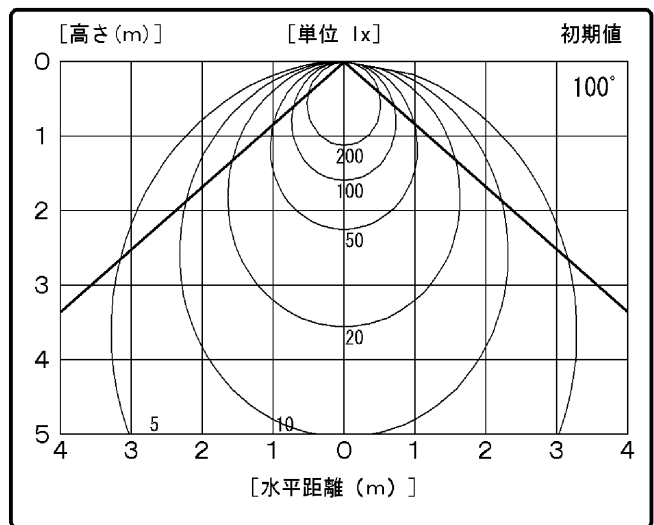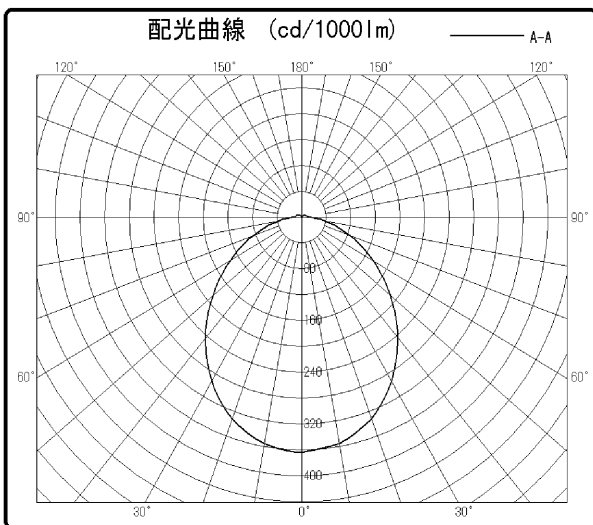

東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6WW-H-GX 53/700
光束	740 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

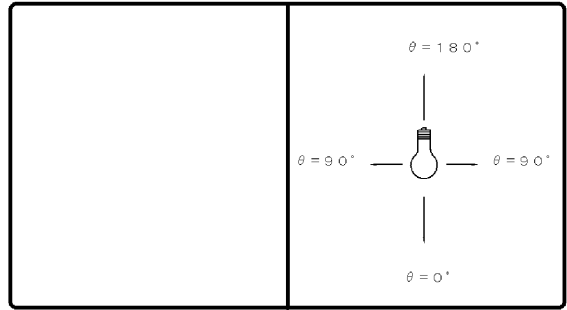



効率	F		%
	F		%
	F	100	%
	器具光束	740	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	363		
10°	355		
20°	331		
30°	292		
40°	243		
50°	189		
60°	135		
70°	84		
80°	39		
90°	13		
100°	11		
110°	10		
120°	8		
130°	7		
140°	5		
150°	3		
160°	2		
170°	1		
180°	0		


反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		30		10		10		0									
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10								
室指数	照明率 (×0.01)																																				
0.60	63	58	49	47	41	40	61	57	48	46	40	39	46	45	39	38	38	38	33	31																	
0.80	75	68	61	58	52	50	73	67	60	57	52	50	57	55	50	49	49	48	43	41																	
1.00	82	74	69	64	59	56	79	72	67	63	58	56	64	61	56	54	55	53	49	46																	
1.25	90	80	77	70	68	63	87	78	75	69	66	63	71	67	64	61	61	60	55	53																	
1.50	95	83	83	75	74	68	91	81	80	74	72	67	76	71	69	66	66	64	60	57																	
2.00	103	89	92	82	84	76	99	87	89	81	82	75	84	78	78	73	74	72	67	65																	
2.50	107	93	98	87	90	81	103	91	95	85	88	80	89	82	83	78	79	76	72	69																	
3.00	111	95	102	90	95	85	106	93	99	88	93	84	93	85	88	82	83	79	76	73																	
4.00	115	98	108	94	102	90	111	96	105	92	99	89	97	89	93	86	88	84	81	78																	
5.00	118	100	112	96	107	93	113	98	108	95	103	92	100	92	97	89	91	87	83	81																	
10.00	124	104	121	102	117	100	119	102	116	100	113	98	107	97	105	95	98	93	90	87																	

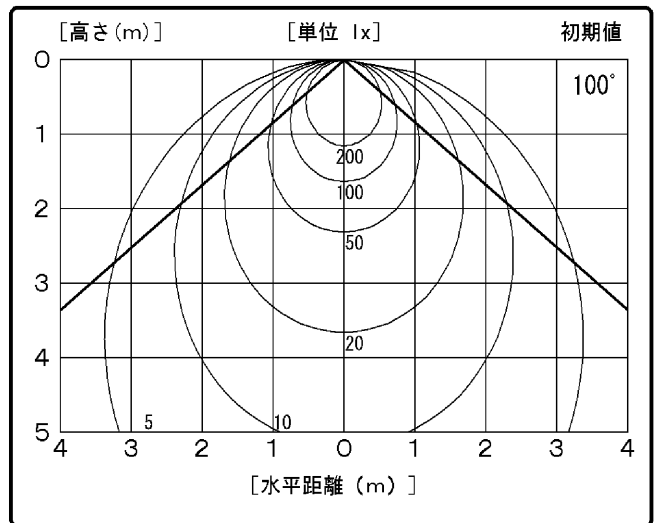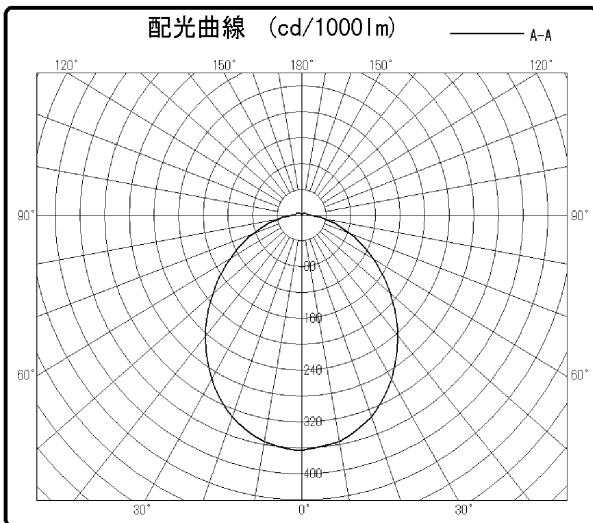

東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6N-H-GX5 3/700
光束	770 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

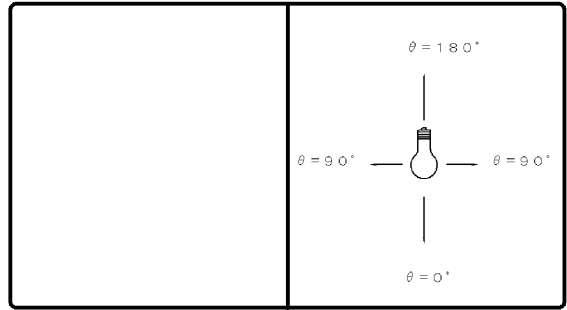



効 率	F		%
	F		%
	F	100	%
	器具 光束	770	lm

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	363		
10°	355		
20°	331		
30°	292		
40°	243		
50°	189		
60°	135		
70°	84		
80°	39		
90°	13		
100°	11		
110°	10		
120°	8		
130°	7		
140°	5		
150°	3		
160°	2		
170°	1		
180°	0		


反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0																
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10															
室指数	照 明 率 (×0.01)																																															
0.60	63	58	49	47	41	40	61	57	48	46	40	39	46	45	39	38	38	38	33	31																												
0.80	75	68	61	58	52	50	73	67	60	57	52	50	57	55	50	49	49	48	43	41																												
1.00	82	74	69	64	59	56	79	72	67	63	58	56	64	61	56	54	55	53	49	46																												
1.25	90	80	77	70	68	63	87	78	75	69	66	63	71	67	64	61	61	60	55	53																												
1.50	95	83	83	75	74	68	91	81	80	74	72	67	76	71	69	66	66	64	60	57																												
2.00	103	89	92	82	84	76	99	87	89	81	82	75	84	78	78	73	74	72	67	65																												
2.50	107	93	98	87	90	81	103	91	95	85	88	80	89	82	83	78	79	76	72	69																												
3.00	111	95	102	90	95	85	106	93	99	88	93	84	93	85	88	82	83	79	76	73																												
4.00	115	98	108	94	102	90	111	96	105	92	99	89	97	89	93	86	88	84	81	78																												
5.00	118	100	112	96	107	93	113	98	108	95	103	92	100	92	97	89	91	87	83	81																												
10.00	124	104	121	102	117	100	119	102	116	100	113	98	107	97	105	95	98	93	90	87																												

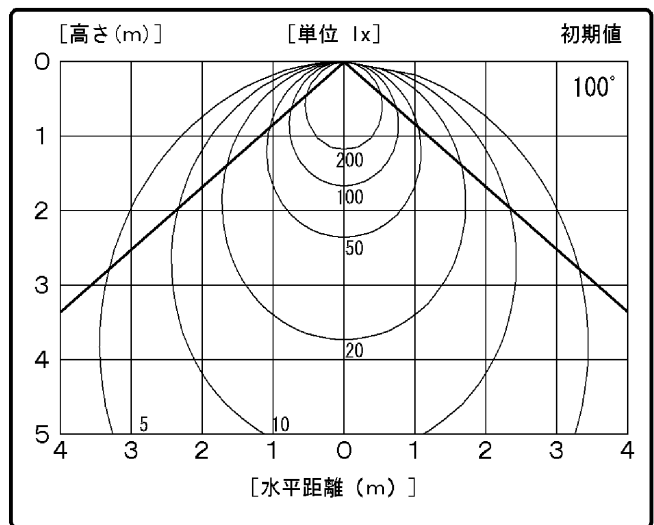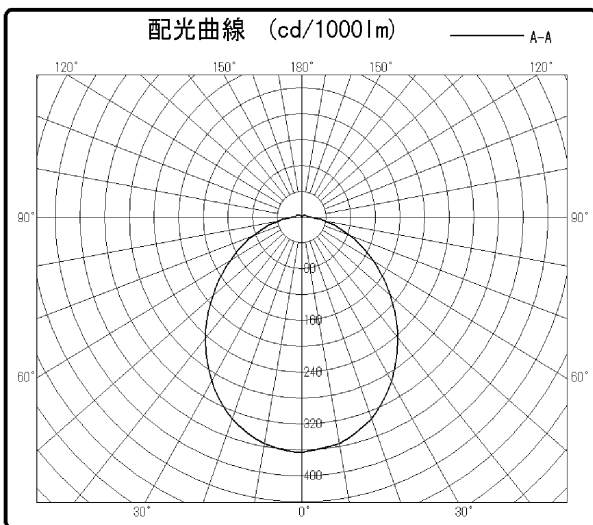

東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6WW-W-GX 53/700
光束	740 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

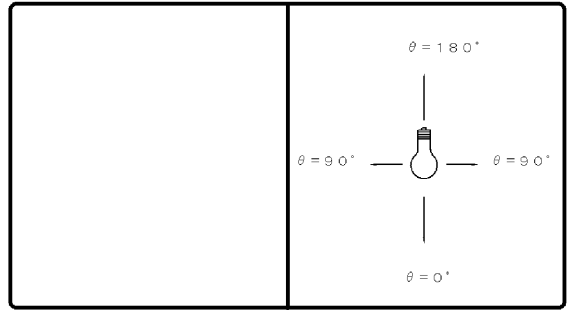



効率	F	%
	F	%
	F	100 %
	器具光束	740 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1252		
10°	992		
20°	633		
30°	362		
40°	192		
50°	94		
60°	56		
70°	37		
80°	22		
90°	8		
100°	5		
110°	3		
120°	2		
130°	2		
140°	2		
150°	3		
160°	3		
170°	3		
180°	0		


反射率 (%)	天井	80						70						50						30						20						0																
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0																
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10															
室指数	照明率 (×0.01)																																															
0.60	82	75	71	68	65	63	80	74	70	67	64	62	69	66	63	62	62	61	58	57																												
0.80	93	84	83	78	76	73	91	83	82	77	75	72	79	76	74	72	73	71	68	67																												
1.00	97	88	87	81	80	76	95	86	86	80	79	76	83	79	78	75	76	74	71	70																												
1.25	102	91	93	85	86	80	100	90	91	84	84	80	87	82	82	79	80	78	75	73																												
1.50	106	93	97	88	90	83	103	92	95	87	88	83	91	85	86	82	83	80	77	76																												
2.00	112	97	103	92	97	88	108	96	101	91	95	88	96	89	91	86	88	85	82	80																												
2.50	115	99	108	95	102	92	111	98	105	94	99	91	99	92	95	89	91	87	85	83																												
3.00	117	101	111	97	105	94	113	99	108	96	103	93	102	94	98	91	94	90	87	85																												
4.00	121	103	115	100	111	97	117	101	112	99	108	96	105	96	102	94	97	93	90	88																												
5.00	123	104	118	102	114	100	118	102	115	100	111	98	108	98	105	96	99	94	92	90																												
10.00	127	107	125	105	123	104	123	105	121	104	119	103	112	102	111	101	104	99	97	95																												

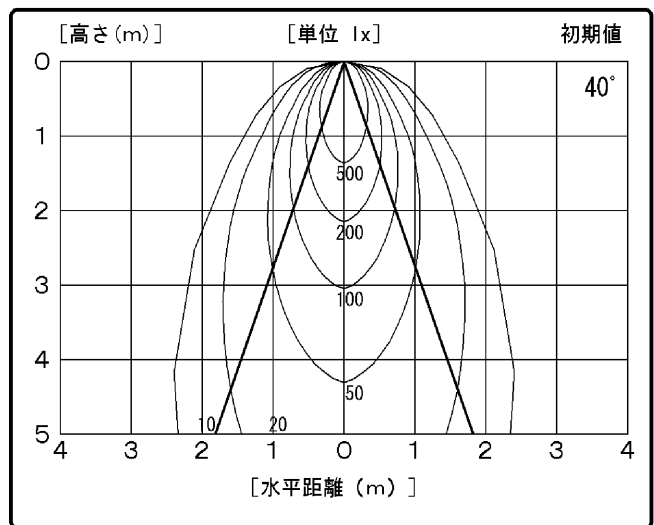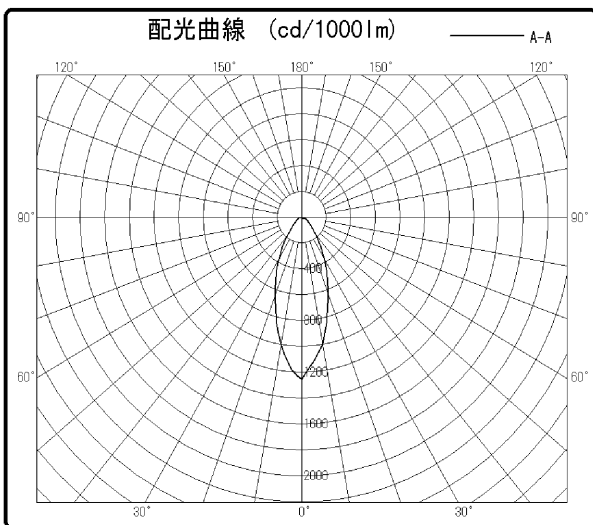

東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF6N-W-GX5 3/700
光束	770 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

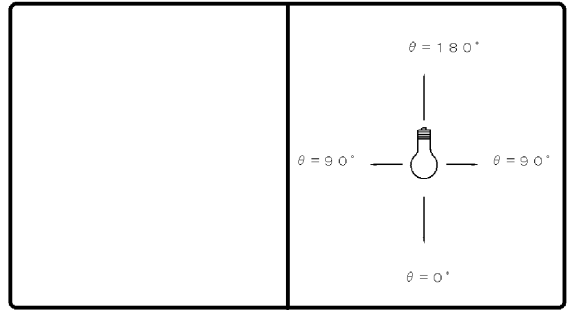

効 率	F	%
	F	%
	F	100 %
	器具 光束	770 lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	1252		
10°	992		
20°	633		
30°	362		
40°	192		
50°	94		
60°	56		
70°	37		
80°	22		
90°	8		
100°	5		
110°	3		
120°	2		
130°	2		
140°	2		
150°	3		
160°	3		
170°	3		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0																																																																																																																																																																																											
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0																																																																																																																																																																																											
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10																																																																																																																																																																																										
室指数	照 明 率 (×0.01)																																																																																																																																																																																																																										
0.60	82	75	71	68	65	63	80	74	70	67	64	62	69	66	63	62	61	58	57	93	84	83	78	76	73	91	83	82	77	75	72	79	76	74	72	73	71	68	67	97	88	87	81	80	76	95	86	86	80	79	76	83	79	78	75	76	74	71	70	102	91	93	85	86	80	100	90	91	84	84	80	87	82	82	79	80	78	75	73	106	93	97	88	90	83	103	92	95	87	88	83	91	85	86	82	83	80	77	76	112	97	103	92	97	88	108	96	101	91	95	88	96	89	91	86	88	85	82	80	115	99	108	95	102	92	111	98	105	94	99	91	99	92	95	89	91	87	85	83	117	101	111	97	105	94	113	99	108	96	103	93	102	94	98	91	94	90	87	85	121	103	115	100	111	97	117	101	112	99	108	96	105	96	102	94	97	93	90	88	123	104	118	102	114	100	118	102	115	100	111	98	108	98	105	96	99	94	92	90	127	107	125	105	123	104	123	105	121	104	119	103	112	102	111	101	104	99	97	95

