

配 光 特 性
LUMINOUS INTENSITY DISTRIBUTION


図 番
SHEET NO.

SM-DC-4165

82-180

器 具 LUMINAIRE	名 称 DESIGNATION	
	形 式 TYPE	
	前 面 ACCESSORY	
光 源 LAMP	名 称 DESIGNATION	高圧ナトリウムランプ HPS LAMP
	形 式 TYPE	透明形 NH70~1000
	光 束 LUMENS	右表参照

形 式	全光束(lm)	形 式	全光束(lm)
NH70・N	6,000	NH70	5,250
NH110・LX	11,000	NH150	14,500
NH180・LX	20,000	NH250	27,500
NH220・LX	28,000	NH400	50,000
NH270・LX	35,000	NH700	88,000
NH360・LX	50,000	NH1000	130,000
NH450・LX	63,000		
NH660・LX	100,000		
NH940・LX	146,000		

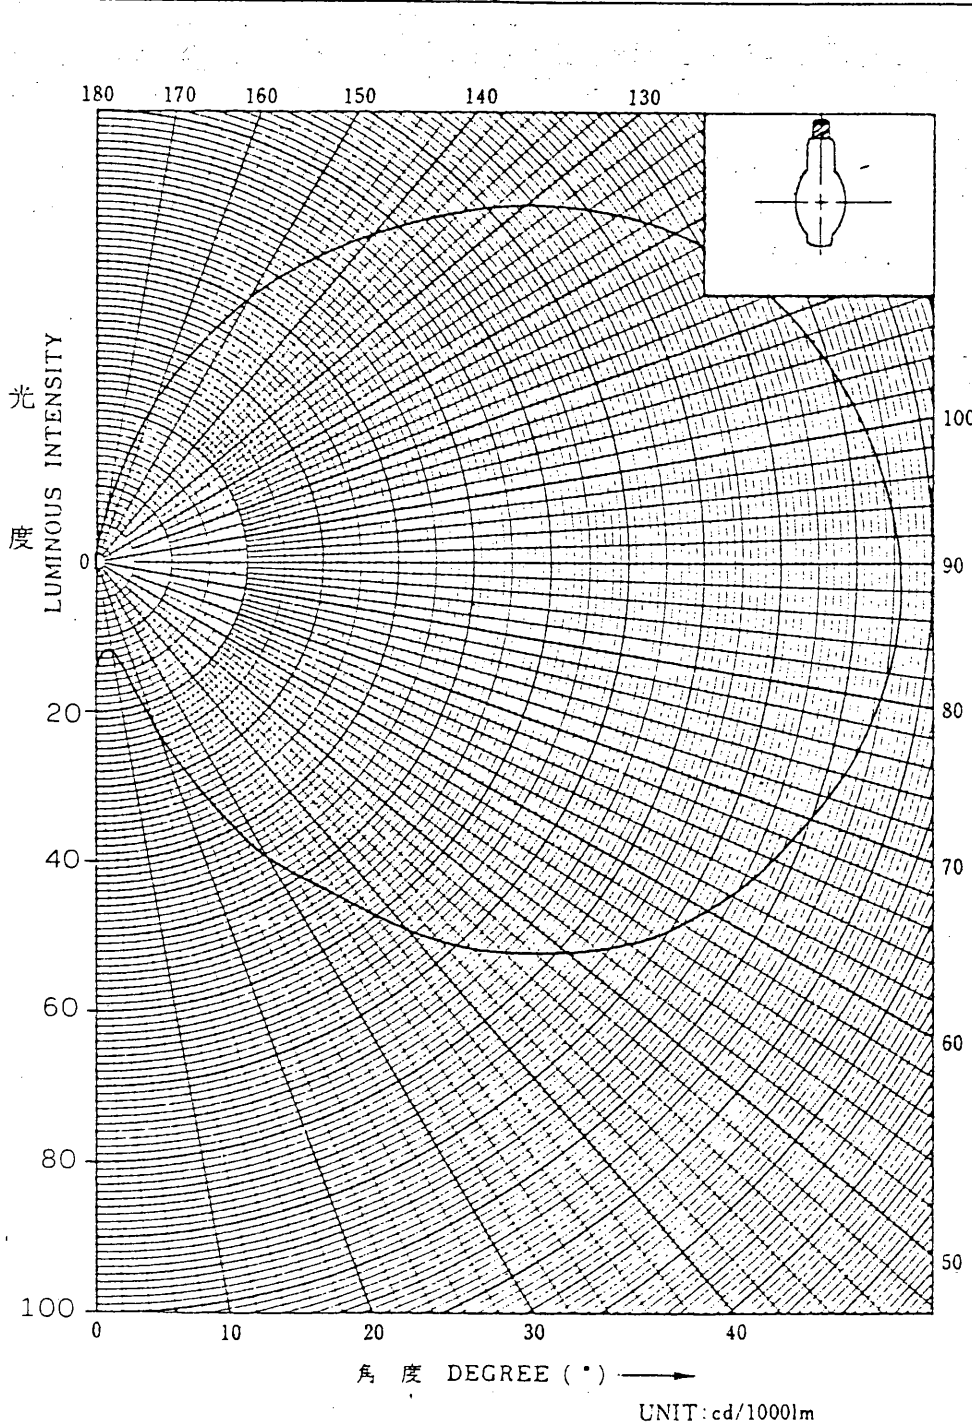

角度 DEGREE			
0°	13		
5°	13		
10°	11		
15°	15		
20°	24		
25°	35		
30°	45		
35°	54		
40°	64		
45°	74		
50°	81		
55°	88		
60°	93		
65°	97		
70°	100		
75°	103		
80°	105		
85°	106		
90°	106		
100°	103		
110°	97		
120°	88		
130°	74		
140°	57		
150°	41		
160°	23		
170°	6		
180°	1		
帯 域 ZONE	光 束 LUMENS	効 率 EFFICIENCY	
0° ~ 30°	lm	%	
0° ~ 60°	lm	%	
0° ~ 90°	lm	%	
90° ~ 180°	lm	%	
0° ~ 180°	lm	%	
~	lm	%	

承認
APD. BY

照査
CHD. BY

作成
MADE BY



岩崎電気株式会社
IWASAKI ELECTRIC CO., LTD.
TOKYO JAPAN